
UltraMatrix AV

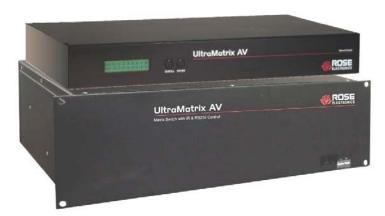

Features and Benefits

- Available models:
 - 8 video/audio in 8 video/audio out
 - 16 video/audio in –16 video/audio out
 - 16 video/audio in 32 video/audio out (NOTE: Audio option available on 8x8 and 16x16 models)
- Extends the monitor and speakers up to 100 feet from the unit
- Supports all video formats (VGA / SVGA / XGA / RGBHV / SOG and others)
- Video bandwidth of 200MHz
- Supports resolutions up to 1600 x 1200
- Save and playback up to 50 different macro routing sequences
- Click and switch intuitive software for video and audio switching
- Add additional units to increase the number of monitors (up to 64)
- Windows based software control for quick and easy switching

a second	Manager and	과과과	21212	222	1 441 441 34	120 ISLAND	the put t		Martes	
		99.0	999	999			ENR DI		T - standards	
P-11	250	••••	***	+ + + + + + + + + + + + + + + + + + +	-0-0-0		EM.01			4
5-11	240	444	444	444	-6-6-6	444				а
	- 10	1.4.1	1.1.1	1.1.1		TTT.			2-uniped)	1
	- 33	X X X	10121	10101	010101	TO OT	DA UL	- 2		-
		111	TIT	TIT	TATAT	TIT	14.14		A company of	3
-			999	777	777	999				а
	- 21+	***		$\phi \phi \phi$	-0-0-0		EM 06	-	A.r. consideration	1
2-18		6-6-6	666	444	-0-0-0	-0-0-0	DA.Pt			1
A-18	- 10		111			111	IM ID	10		1
A 11		III	III	III	0.0101	T T T T	EM TE		I - company -	а
					111	TTT		40		4
		999	999	999	999	999	D# 11		R-suspect-	1
Pr 12		***		***	-0-0-0		24.14	11		1
Be 12	100		444	1.1.1	10101	A 44	14.0			а
20.14						111	204.05	-	Prompeti	3
A 11	- ni	19191	LII	III	010101	THE PARTY				J,
		TYY	TTTT	YYY	TTT	10101				
2-14						-0-0-0			Receil	

Pick the source, pick the destination, Click on the cross-point in the matrix and instantly switch

Audio / Video Matrix Switch

Available in 3 different models, an 8 x 8. 16 x 16, or 16 x 32 model combinations (8x8 and 16x16 offer audio switching option) Switch input video and audio sources to one or more video and audio outputs Switch video and audio from any input to any output

Click and switch on-screen matrix for quick and easy video and audio routing

Built-in macro player/recorder for controlling video and audio switching

The UltraMatrix AV[™] Advantage . .

Designed especially for control rooms, audio/video presentations, security centers and many other digital media applications.


Easily connect any video / audio source to any video / audio output using the switching matrix software. Video and audio sources are routed together from an input source to an output destination.

Record your video and audio switching scheme and save it in a macro for on demand use.

Display the switching matrix panel and where the source and destination cross. click on that point and the video and audio are instantly switched.



Typical Application



Switch up to 8 or 16 video / audio sources

Overview The UltraMatrix AV is a high-quality video and stereo audio switching matrix. Up to 8 or16 video and 8 or 16 audio sources can be switched to eight, sixteen, or 32 different video monitors and stereo speakers up to 20 foot away. Video and audio sources are switched together to multiple destinations.

Installation Installing your UltraMatrix AV is an easy and simple process. Connect your computers video and audio output ports to the corresponding ports on the right side or the rear panel. Connect the monitors and stereo speakers to corresponding ports on the left side of the rear panel. Install the communication software on the controlling computer. Connect the controlling computer's serial port to UltraMatrix AV's serial connector using a serial control cable and apply power.

Operation

And I		Things Tarray	There is
	++++++++++++++++++ +++++++++++++++	1211 (11)	1. constraint
		141 A	
	31000000000000000000000000000000000000	1411	
	330000000000000000000000000000000000000	1417 A	1. mentionic
	300000000000000000000000000000000000000	100 A	
	300000000000000000000000000000000000000		1 Consignali
2		1410	
		141 1	 A considerable
-		14 d	
-		10.1	In consignate
		12.1 11	
-		12 T H	t-mainet
ł.,	M+++++++++++++++++++++++++++++++++++++		
		14.1 M	
1		14 H	1 - maniarati

Choose the video and audio source from the left column, choose the destination from the top row, click on the cross point and the connection is made. Record a switching sequence and save it in a macro. Play a macro simply by clicking of the specific macro button.

Note: All models switch using the matrix software, the 8x8 model can also be operated from the front panel push buttons and LCD display.

Part Numbers

UMA-08VX08V	8 x 8 AV Matrix switch (VGA)					
UMA-16VX16V	16 x 16 AV Matrix Switch (VGA)					
UMA-16VX32V	16 x 32 AV Matrix Switch (VGA)					
-A1 part number suffix = uni-directional audio						

Specifications

opeenieulene						
Dimensions	Width	Depth	Height	Weight		
8 x 8 (in)	19.0	11.25	2.62	8 lbs		
(cm)	48.2	28.6	13.3	3.0 kg		
16 x 16 (in)	19.0	11.25	5.24	20 lbs		
(cm)	48.2	28.6	13.3	7.5 kg		
Resolution		Up to	1600 x 120	00		
Bandwidth	200 N	200 MHz				
VIDEOInput Signal1 Volt pk-pkInput Impedance75 Ω Output Impedance100 Ω						
AUDIO Freq. Resp Signal		20 Hz to 20 KHz +/- 0.5dB 15KHz 0 dB unbalanced, 100 Ω				
Connectors Video Audio		HD15 3.5mi	F m stereo ai	udio jack		
Power	Power 16 x 16 - 90 – 230 VAC IEC, 1A 50/60 Hz 8 x 8 – 90 – 230 VAC, 3A 50/60Hz to 5VDC power adapter					
		Rear I	Panel			

Rear Panel

8 video & 8 audio in | 8 video & 8 audio out



16 video & 16 audio out | 16 video & 16 audio in

Phone: 281-933-7673 E-mail: sales@rose.com 10707 Stancliff Rd. Houston. TX 77099

Rose Electronics – Europe: +49 (0)2454 969442 Rose Electronics – Asia: +65 6324 2322DS - UM-AV – 1.9© Copyright 2009 Rose Electronics. All rights reserved

